




# LigoDLB MACH 5 ac

5 GHz high-capacity wireless device


## Incredible performance

500+ Mbps throughput - a result of powerful hardware platform with 802.11ac technology based radio and a proprietary data transmission protocol (iPoll). Incorporating a QCA 9557 CPU (720 MHz), a QCA 9882 radio and 128 MBytes of RAM and 128 MBytes of flash memory, the LigoDLB MACH 5ac series devices are an ideal solution for capacity demanding applications. State of the art RF design with great output power and sensitivity parameters improve range and capacity over highest the modulation - 256 QAM. The 48V (802.3af compliant) Gigabit Ethernet port allows utilizing the full capacity of the radio when used in a point-to-point or point-to-multipoint network design. LigoDLB ac series devices are backwards compatible with LigoDLB devices using iPoll mode, which helps to expand or upgrade existing networks using the latest technologies over time.

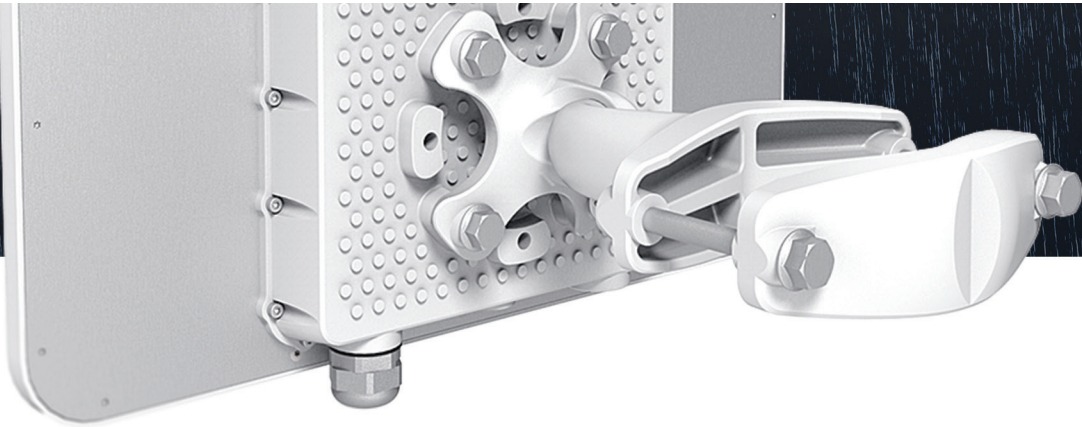

## Built to perform

LigoDLB MACH 5 ac is designed to provide maximum performance in any conditions. Metal IP standards rated enclosure not only protects from harsh weather conditions, but also allows using high-power radio for long distance links at the same time creating a shield for unwanted RF noise from nearby sources. Directional 23 dBi panel antenna makes this product ideal for medium to long range communication both in point to point and point to multipoint scenario. Such outstanding quality and flexibility makes this product ideal option for wireless bridging especially in mission critical connectivity applications requiring reliable data transmission.

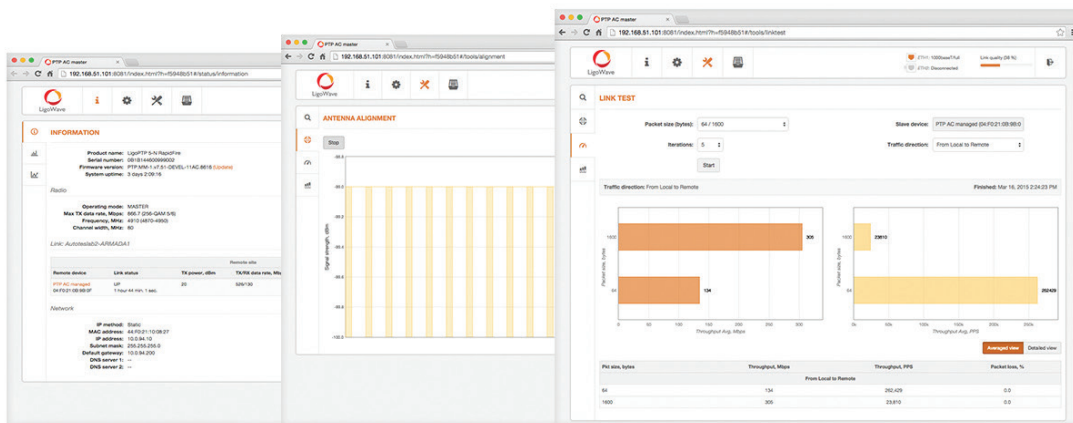

## Powerfull OS

The LigoDLB OS is a highly functional and easy to use operating system embedded in all LigoDLB hardware devices for effortless setup and trouble free operation. High performance (500 Mbps) allows offering more bandwidth together with additional services such as VoIP and IPTV. This is possible when using LigoWave's smart QoS mechanism and multi-cast traffic enhancements for triple play services. Such services are essential for all next generation service providers to complement their existing portfolios. iPoll, LigoWave's proprietary transmission protocol, ensures smooth performance with a high number of clients even in noisy environments.

# Specifications

Product/ distance recommendation	PTMP mode	PTP mode	PTP mode (full capacity)
LigoDLB MACH 5ac	12 km/ 7.45 mi	30 km/ 18.64 mi	18 km/ 11.18 mi

## Wireless

WLAN standard	IEEE 802.11 a/n/ac, iPoll 3
Radio mode	MIMO 2x2
Radio frequency band	5.150 - 5.850 GHz (FCC 5.150 - 5.250 and 5.725 - 5.850 GHz)
Transmit power	Up to 30 dBm (country dependent)
Channel size	5, 10, 20, 40, 80 MHz
Modulation schemes	802.11 a/n: OFDM (64-QAM, 16-QAM, QPSK, BPSK) 802.11 ac: OFDM (256-QAM, 64-QAM, 16-QAM, QPSK, BPSK)
Data rates	802.11 ac @ 40 MHz: 400, 360, 300, 270, 240, 180, 120, 90, 60, 30 Mbps 802.11 ac @ 80 MHz: 866, 780, 650, 585, 520, 390, 260, 195, 130, 65 Mbps
Error correction	FEC, LDPC
Management	Time division duplex

40 MHz	Modulation, Mbps	400	360	300	270	240	180	120	90	60	30
	TX Power, dBm	26	27	28	29	30	30	30	30	30	30
	Receive sensitivity, dBm	-70	-72	-76	-78	-80	-84	-87	-91	-94	-97
80 MHz	Modulation, Mbps	866	780	650	585	520	390	260	195	130	65
	TX Power, dBm	24	25	26	27	28	29	29	30	30	30
	Receive sensitivity, dBm	-67	-69	-73	-75	-77	-81	-84	-88	-91	-95

## Antenna

Type	Integrated dual-polarized directional panel antenna
Gain	23 dBi

## Wired

Interface	10/100/1000 Base-T, RJ45
-----------	--------------------------

---

## Physical

Dimensions	Length 379 mm (14.9 "), width 387 mm (15.2 "), height 80 mm (3.15 ")
Weight	3.3 kg (7.3 lb)
Mounting	Combination, heavy duty wall / pole mount bracket included

---

## Power

Power input method, voltage	PoE 802.3at, isolated 42 - 57 VDC (PoE inserter and AC/DC adapter are included)
Power consumption (max)	8.6 W
Power output method, voltage	PoE 802.3af, 48 VDC, 12.95W maximum

---

## Environmental

Operating temperature	-40°C (-40 F) ~ +65°C (+149 F)
Humidity	0 ~ 90 % (non-condensing)

---

## Management

System monitoring	SNMP v1/2c/3 server, Syslogs, system alerts via e-mail and SNMP trap
-------------------	--


---

## Regulatory

Certification	FCC/IC/CE
---------------	-----------

---

## Antenna specifications

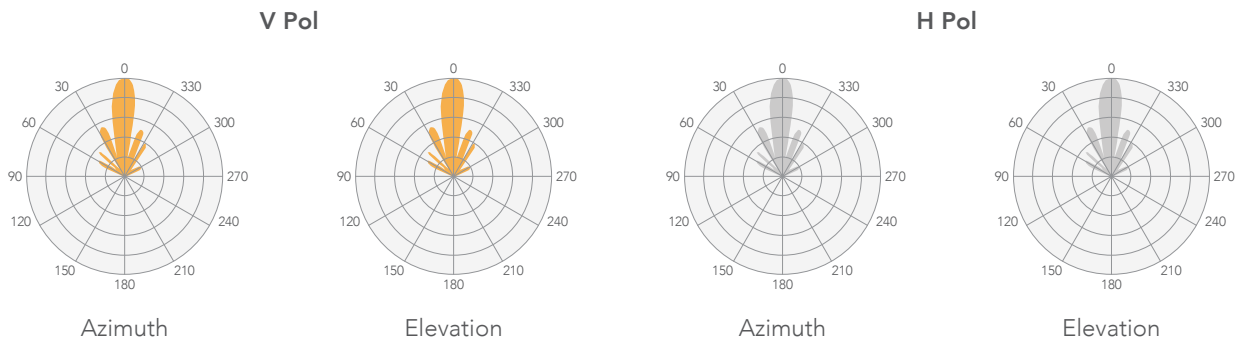

---

Frequency range	5.1 - 5.9 GHz
Gain	23 dBi
Polarization	Dual linear
Cross-pol Isolation	27 dBi
VSWR	1.5:1
Azimuth beamwidth (H pol)	6 deg
Azimuth beamwidth (V pol)	7 deg
Elevation beamwidth	9 deg

---



**LigoWave**

[www.ligowave.com](http://www.ligowave.com)

## **LigoDLB MACH 5ac**

Copyright © 2017 LigoWave. All rights reserved. LigoWave, the LigoWave logo, are trademarks of LigoWave. All other company and product names may be trademarks of their respective companies. While every effort is made to ensure the information given is accurate, LigoWave does not accept liability for any errors or mistakes which may arise. Specifications and other information in this document may be subject to change without notice. To learn more about LigoWave products, visit [www.ligowave.com](http://www.ligowave.com).