

LigoPTP UNITY test on a 25 km link in Hungary

LigoWave's distributor in Hungary,
Accesspoint Kft., provided UNITY devices
to Nicom Wireless Ltd. They configured a
25.3 kilometer link using the N-connector
models of the UNITY product coupled
with 90 cm (32 dBi) dish antennas from
Jirous. Impressive results were achieved
for such a long distance link with signal
levels of -50 to -60 dBm and running on
the highest modulation (64 QAM 5/6). The
Mikrotik Winbox tool was used to measure
the throughput and packet per second

rate. The average single direction TCP throughput was approximately 160 Mbps and the average single direction UDP throughput was nearly 170 Mbps! The comparison of the PPS rate with different packet sizes can be found in the table below. The following pages contain a LigoWave LinkCalc path analysis with satellite map illustration, and the performance screenshots from the bandwith testing tool.

	64 bytes	512 bytes	1024 bytes	2048 bytes
Throughput, Mbps	70	160	170	160
PPS rate	140000			

Table 1: Throughput results of the LigoPTP UNITY 5-N link




Summary:

- 220 Mbps capacity
- 140000 PPS rate
- 2nd Ethernet port for wireless failover
- Wire speed QoS (L2 and L3)
- 2 x Gigabit Ethernet ports
- External OLED screen
- Integrated surge protection
- IP-67 standards rated enclosure
- · Flexible and professional mounting bracket






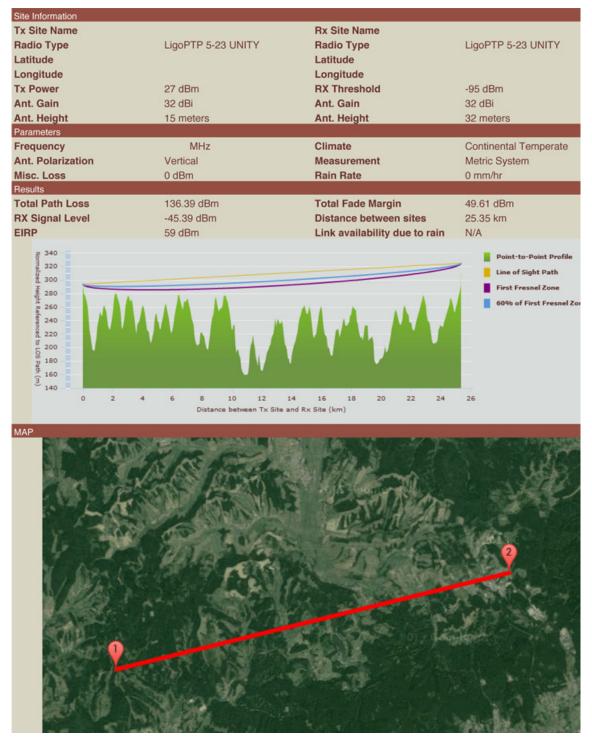

Picture 1: Link path analysis and satellite map illustration



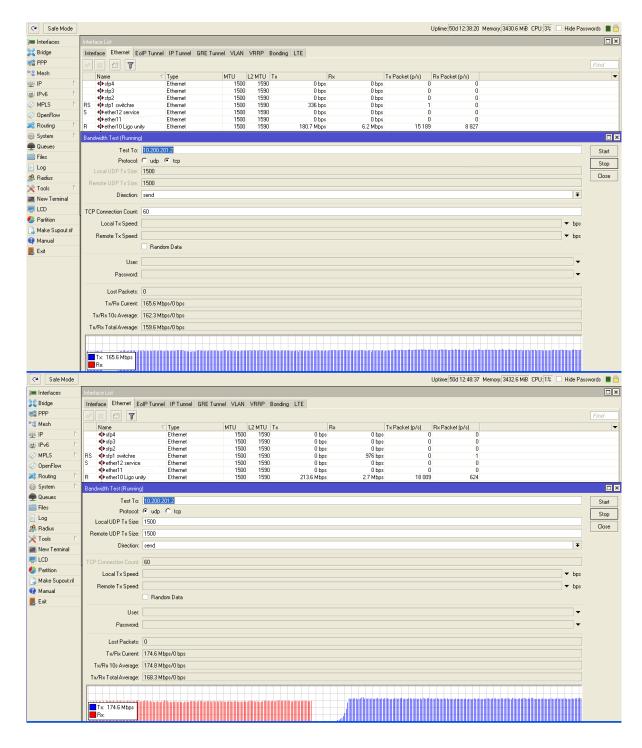

Picture 2: Screenshot from the bandwidth testing tool

Any third party products, brands or trademarks listed above are the sole property of their respective owner.