



LigoPoE AC to 24V adapter (100Mbps)

COPYRIGHT ©2018 LIGOWAVE

LigoPoE AC to 24V adapter (100Mbps)

The adapter is used to power passive PoE of NFT 1Ni, DLBn products product from standard AC power source.


Electrical specification

Input voltage	100 – 240VAC, 50/60Hz
Output voltage	24VDC +/- 5%
Output power	12W
Data rate	100Mbps
Protection	Short circuit, Overvoltage, Overcurrent

Physical specifications

Input jack	IEC320 C6
Output jack	RJ45
Data jack	RJ45
Dimensions	91×45.5×30mm
Weight	150g
Operating temperature	–20 to +60°C

Connection scheme

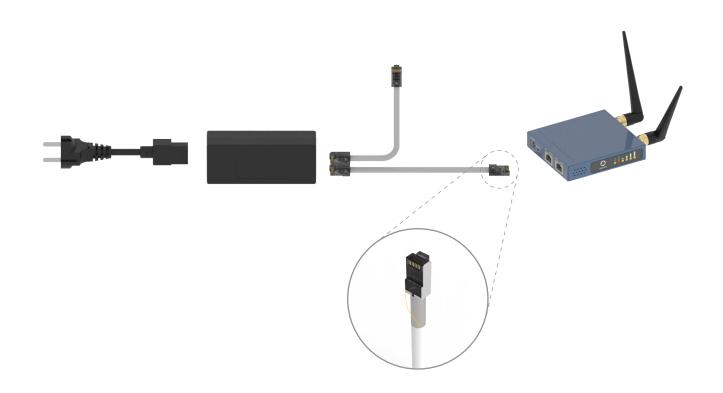



LigoPoE AC to 24V adapter (100Mbps)

Copyright © 2018 LigoWave. All rights reserved. LigoWave, the LigoWave logo, are trademarks of LigoWave. All other company and product names may be trademarks of their respective companies. While every effort is made to ensure the information given s accurate, LigoWave does not accept liability for any errors or mistakes which may arise. Specifications and other information in his document may be subject to change without notice. To learn more about LigoWave products, visit www.ligowave.com.